



A-Trode®

A universal cap electrode for resistance welding of light-to-medium gauge coated and uncoated steels

A-Trode® production

Produced by Luvata's proprietary billet casting process, A-Trode's freedom from oxygen allows us to alloy the copper with the optimum levels of chrome and zirconium. Electrodes are cold headed or machined to suit the required shape.

Luvata has a long history of supplying high quality CuCrZr (A-Trode) electrodes.



About Luvata

Luvata is a world leader in metal solutions manufacturing and related engineering services to industries such as renewable energy, automotive, healthcare, and power generation and distribution. The company's continued success is attributed to its longevity, technological excellence and strategy of building partnerships beyond metals. Employing over 1,400 staff in 7 countries, Luvata works in partnership with customers such as ABB, CERN, Siemens and Toyota. Luvata is a group company of Mitsubishi Materials Corporation.



Specification - Quality

Alloy	C18150 CuCrZr, EN ISO 5182 A2/2, DIN 17666 Wn 2.1293, RWMA Class II												
Chemical composition	Cr 0.7% to 1.2%, Zr 0.06% to 0.15%. Others max. 0.2%, Cu balance.												
Physical material properties at 20°C	<table border="0"> <tr> <td>Mass</td> <td>8.9g/cm³</td> </tr> <tr> <td>Specific heat</td> <td>376 J/kg.K</td> </tr> <tr> <td>Thermal conductivity</td> <td>320 W/m.K</td> </tr> <tr> <td>Expansion coefficient (20-300°C)</td> <td>17.0 x 10⁻⁶ m/mK</td> </tr> <tr> <td>Electric conductivity (solution-annealed and hardened)</td> <td>min. 43 S/m</td> </tr> <tr> <td>Softening temperature</td> <td>min. 500°C</td> </tr> </table>	Mass	8.9g/cm ³	Specific heat	376 J/kg.K	Thermal conductivity	320 W/m.K	Expansion coefficient (20-300°C)	17.0 x 10 ⁻⁶ m/mK	Electric conductivity (solution-annealed and hardened)	min. 43 S/m	Softening temperature	min. 500°C
Mass	8.9g/cm ³												
Specific heat	376 J/kg.K												
Thermal conductivity	320 W/m.K												
Expansion coefficient (20-300°C)	17.0 x 10 ⁻⁶ m/mK												
Electric conductivity (solution-annealed and hardened)	min. 43 S/m												
Softening temperature	min. 500°C												
Dimensions and tolerances	To ISO 5821 or other standards as required. Special electrodes to customer drawing.												
Packaging	Most items in cartons of 500 pieces.												
Documentation	Acceptance test certificate EN 10204 3.1 B possible if desired against a charge.												
Area of application	Male and female resistance welding electrodes Backing dies - series and indirect Seam welding wheels Projection welding electrodes												


Errors and omissions excepted. Values given are industry standards.

Mechanical Specifications - Quality

Form of supply	Tensile strength [N/mm ²]	0.2% Offset yield strength [N/mm ²]	Elongation AS [%]	Hardness HV
Electrodes	≥ 490	≥ 430	≥ 15	≥ 172

Luvata's other resistance welding products:

Nitrode® Dispersion Strengthened Copper
Z-Trode® Zirconium Copper
Backing dies, adaptors and other resistance welding accessories

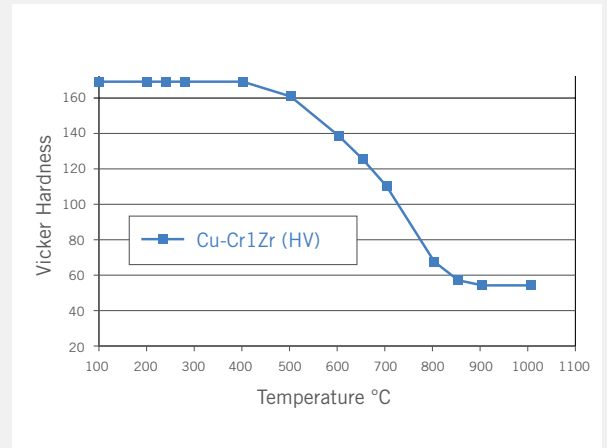

A-Trode® metallurgy



Conventional CuCrZr grain structure



Luvata's CuCrZr fine grain structure

Luvata Ohio Inc.
1376 Pittsburgh Drive
Delaware
Ohio 43015
USA
Tel: +1 740 363 1981

Luvata Welwyn Garden Ltd.
Centrapark
Bessemer Road
Welwyn Garden City
Hertfordshire AL7 1HT
United Kingdom
Tel: +44 1707 379789

MM Metal Products Suzhou
53 Sanzhuang Street
Weiting Town
Suzhou Industrial Park
Jiangsu Province
215121 China
Tel: +86 512 6285 1018

Luvata Sao Paulo
Avenida dos
Autonomistas, n° 4.900
Galpão PR406-B
06194-060
Osasco - SP Brazil
Tel: +55 11 4624 7661

Luvata St. Petersburg
19th line V.O., 34-1-B
199178 St. Petersburg,
Russia
Tel: +7 812 449 27 97

